


Select Foam Thickness Option  
(See Page 2)

Select Foam Option  
(See Page 2)

7/16" OSB

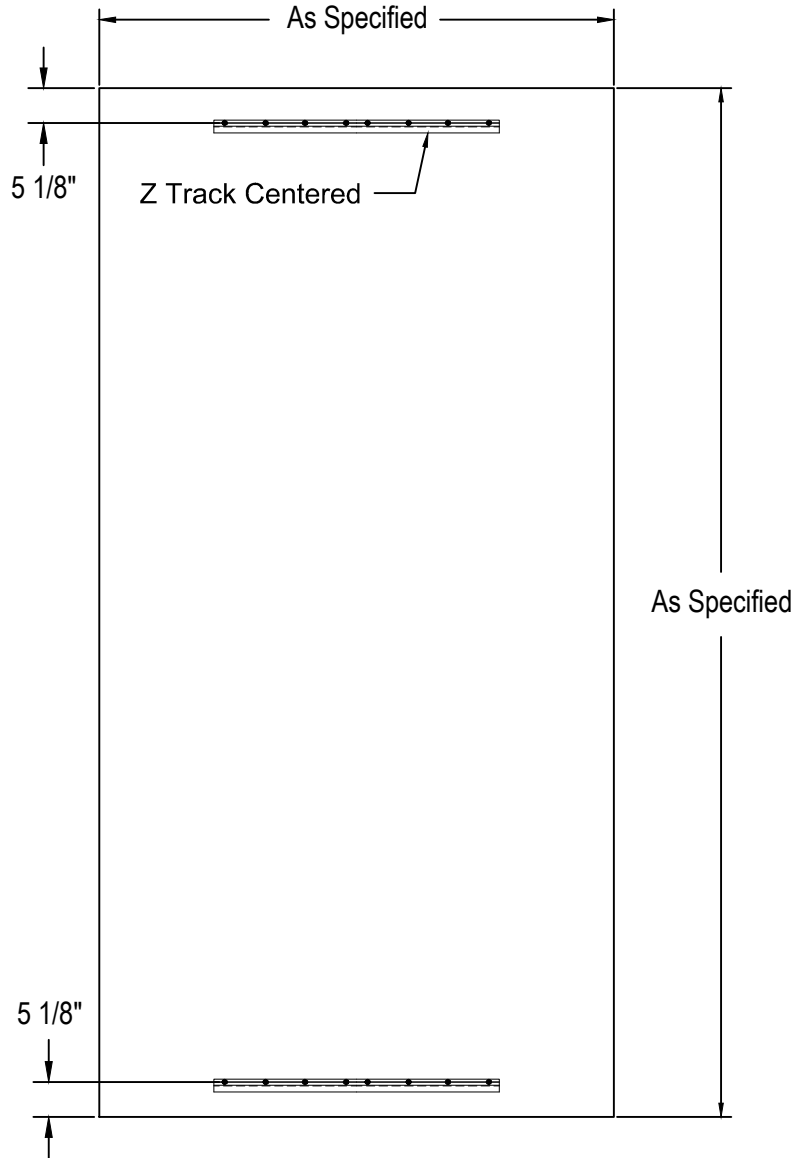

Specifications & Options On Page 2



## PRODUCT SPECIFICATION

WP2USZW SOLID COLOR HIDDEN Z TRACK WALL PADDING

REVISED 2/8/2018

## Flat Wall Padding Options

Model Number	Style	Foam	Backing	Vinyl Cover	Mounting System
WP2USFW	Protector™	2" Polyurethane	7/16" OSB	14 oz. Solid Color	Flange
WP2USZW	Protector™	2" Polyurethane	7/16" OSB	14 oz. Solid Color	Z-Track
WP2USVW	Protector™	2" Polyurethane	7/16" OSB	14 oz. Solid Color	Velcro
WP2USVS	Protector™	2" Polyurethane	Soft Back	14 oz. Solid Color	Velcro
WP2UGFW	Protector™	2" Polyurethane	7/16" OSB	14 oz. Graphic	Flange
WP2UGZW	Protector™	2" Polyurethane	7/16" OSB	14 oz. Graphic	Z-Track
WP2UGVW	Protector™	2" Polyurethane	7/16" OSB	14 oz. Graphic	Velcro
WP2UGVS	Protector™	2" Polyurethane	Soft Back	14 oz. Graphic	Velcro
WP2NSFW	Firewall	2" Neoprene	7/16" OSB	14 oz. Solid Color	Flange
WP2NSZW	Firewall	2" Neoprene	7/16" OSB	14 oz. Solid Color	Z-Track
WP2NSVW	Firewall	2" Neoprene	7/16" OSB	14 oz. Solid Color	Velcro
WP2NSVS	Firewall	2" Neoprene	Soft Back	14 oz. Solid Color	Velcro
WP2NGFW	Firewall	2" Neoprene	7/16" OSB	14 oz. Graphic	Flange
WP2NGZW	Firewall	2" Neoprene	7/16" OSB	14 oz. Graphic	Z-Track
WP2NGVW	Firewall	2" Neoprene	7/16" OSB	14 oz. Graphic	Velcro
WP2NGVS	Firewall	2" Neoprene	Soft Back	14 oz. Graphic	Velcro

## Padding Upgrade Options

### WPUP3U

Upgrade any 2" polyurethane foam wall padding to 3" polyurethane foam for added player protection or to meet local codes or project specifications.

### WPUP3N

Upgrade any 2" neoprene foam wall padding to 3" neoprene foam for added player protection or to meet local codes or project specifications.

### WPUP2HD

Upgrade any 2" polyurethane foam wall padding to 2" high density foam for added player protection or to meet local codes or project specifications.

### WPUPFRC

Upgrade any wood backed wall padding to add a fire retardant coating to the 7/16" OSB backing to meet local codes or project specifications.

### WPUPVONAR

Upgrade to add Vonar fire retardant fabric to any wood backed wall padding to meet local codes or project specifications.

### COLOR SELECTION

Select desired pad color from:

(<https://www.bisoninc.com/color-options/>)

Specify Color: \_\_\_\_\_

## Protector™ Wall Padding Specifications (Standard Specs)

All full color graphic and solid color Protector wall padding including custom corner, column, door and stage padding is constructed of polyurethane foam with an Indentation Load Deflection (ILD) of 43-53 lbs. per 50 cubic inches and 1.50 pounds per cubic foot density per ASTM Tests B1 and A Foam conforms to California Fire Code TIB 117:2013 Section 3 and FMVSS 302 Foam also conforms to ISO 20743:2007 Antibacterial and AATCC 30 Antifungal Standards 14 ounce vinyl covering has a ASTM D2261 tear strength of 92 x 83 pounds per inch and has been treated for mildew and UV protection Vinyl conforms to NFPA-701 CSFM and Class A ASTM E-84 Wood backed padding is mounted on 7/16" OSB composite board with the foam attached to the OSB with water based adhesive.

## Firewall™ Wall Padding Specifications (Standard Specs)

Full color graphic and solid color firewall padding including custom corner, column, door and stage padding is constructed of neoprene foam with Indentation Load Deflection (ILD) of 90-110 per ASTM D3574 Test B1 and a density of 1.90 - 2.10 pound per cubic foot per ASTM D3574 Test A Firewall neoprene foam passes California Fire Code TIB 117:2013 14 ounce vinyl covering has a ASTM D2261 tear strength of 92 x 83 pounds per inch and has been treated for mildew and UV protection Vinyl conforms to NFPA-701 CSFM and Class A ASTM E-84 Wood backed padding is mounted on 7/16" OSB composite board with the foam attached to the OSB with water based adhesive Assembled padding has been tested and meets NFPA 286.

REVISED 2/8/2018